



NON-METAL



ALUMINIUM



STAINLESS STEEL


MY1 - 50 / X X / X X - Special Code




MAX-FLO	CONNECTION SIZE 50 - 2"	CENTER BLOCK P - Polypropylene A - Aluminium	WETTED BODY P - Polypropylene K - PVDF A - Aluminium 4 - SUS304 6 - SUS316 L - SUS316L	DIAPHRAGM B - Buna-N H - Hytrel R - Santoprene V - Viton T - PTFE	VALVE BALL H - Hytrel R - Santoprene V - Viton T - PTFE	VALVE SEAT P - Polypropylene K - PVDF H - Hytrel R - Santoprene V - Viton A - Aluminium 4 - SUS304 6 - SUS316 L - SUS316L
----------------	-----------------------------------	---	---	---	--	---

TECHNICAL SPECIFICATIONS



Max flow (l/min)	587
Max head (m)	84
Max air inlet pressure (bar)	8.4
Max particle size (mm)	6
Suction lift (mwc)	
Dry:	5
Wet:	8
Fluid ports connection (inch)	
Plastic:	2" ANSI #150 Flange
Metal:	2" BSP (T)
Air inlet ports (inch)	½" BSP (T)
Weight (kg)	
Polypropylene:	25
PVDF:	34
Aluminium:	27
Stainless steel:	48

PERFORMANCE CURVE


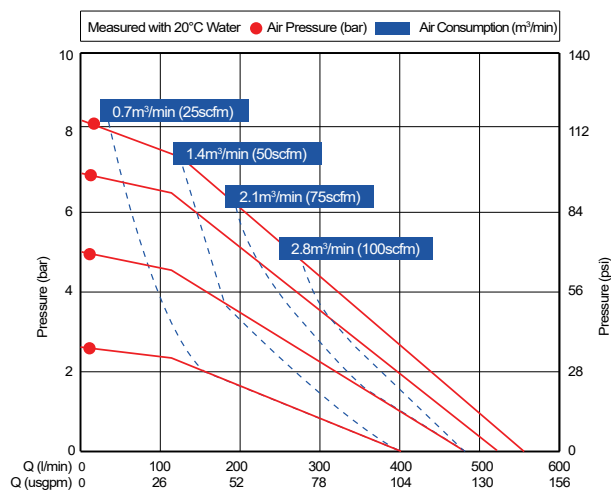


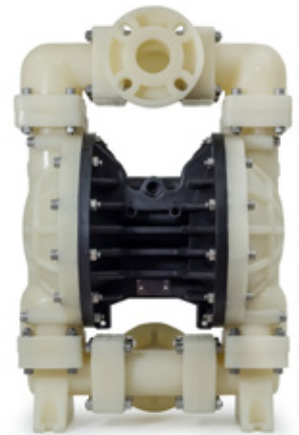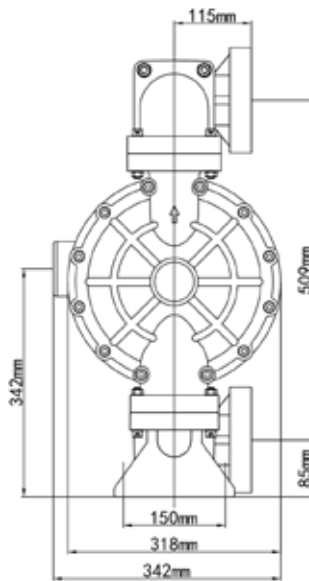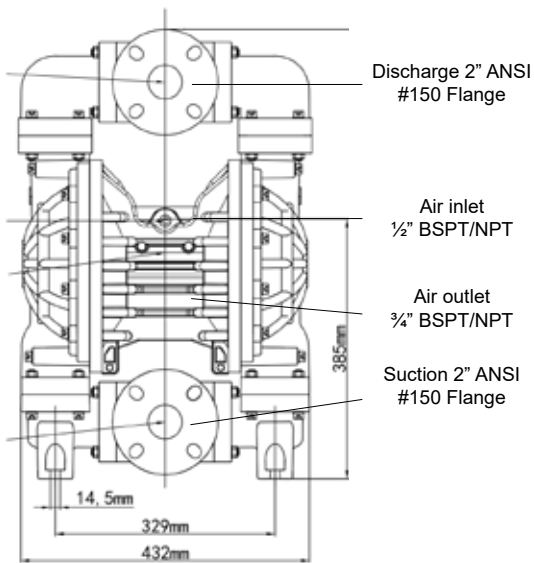

NON-METAL

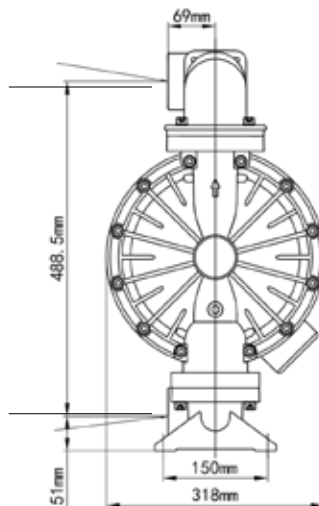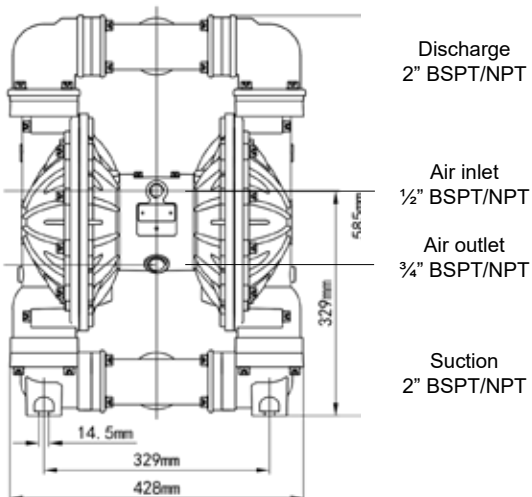

ALUMINUM

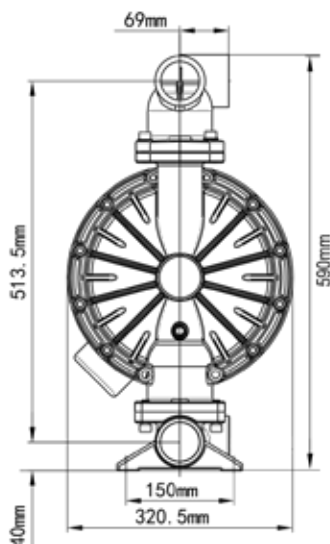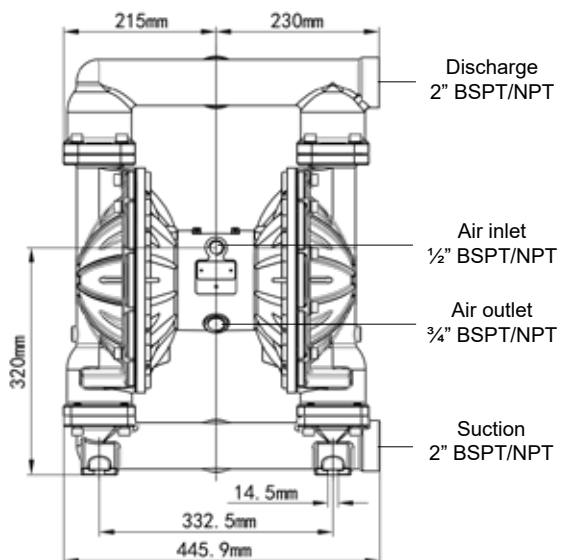

STAINLESS STEEL